
imageRUNNER 2224N II

Canon
Delighting You Always

Robust Functionality, Effortless Efficiency

Designed with essential features for a seamless everyday workflow, the new **imageRUNNER 2224N II** delivers robust and efficient monochrome printing by combining usability with functionality.

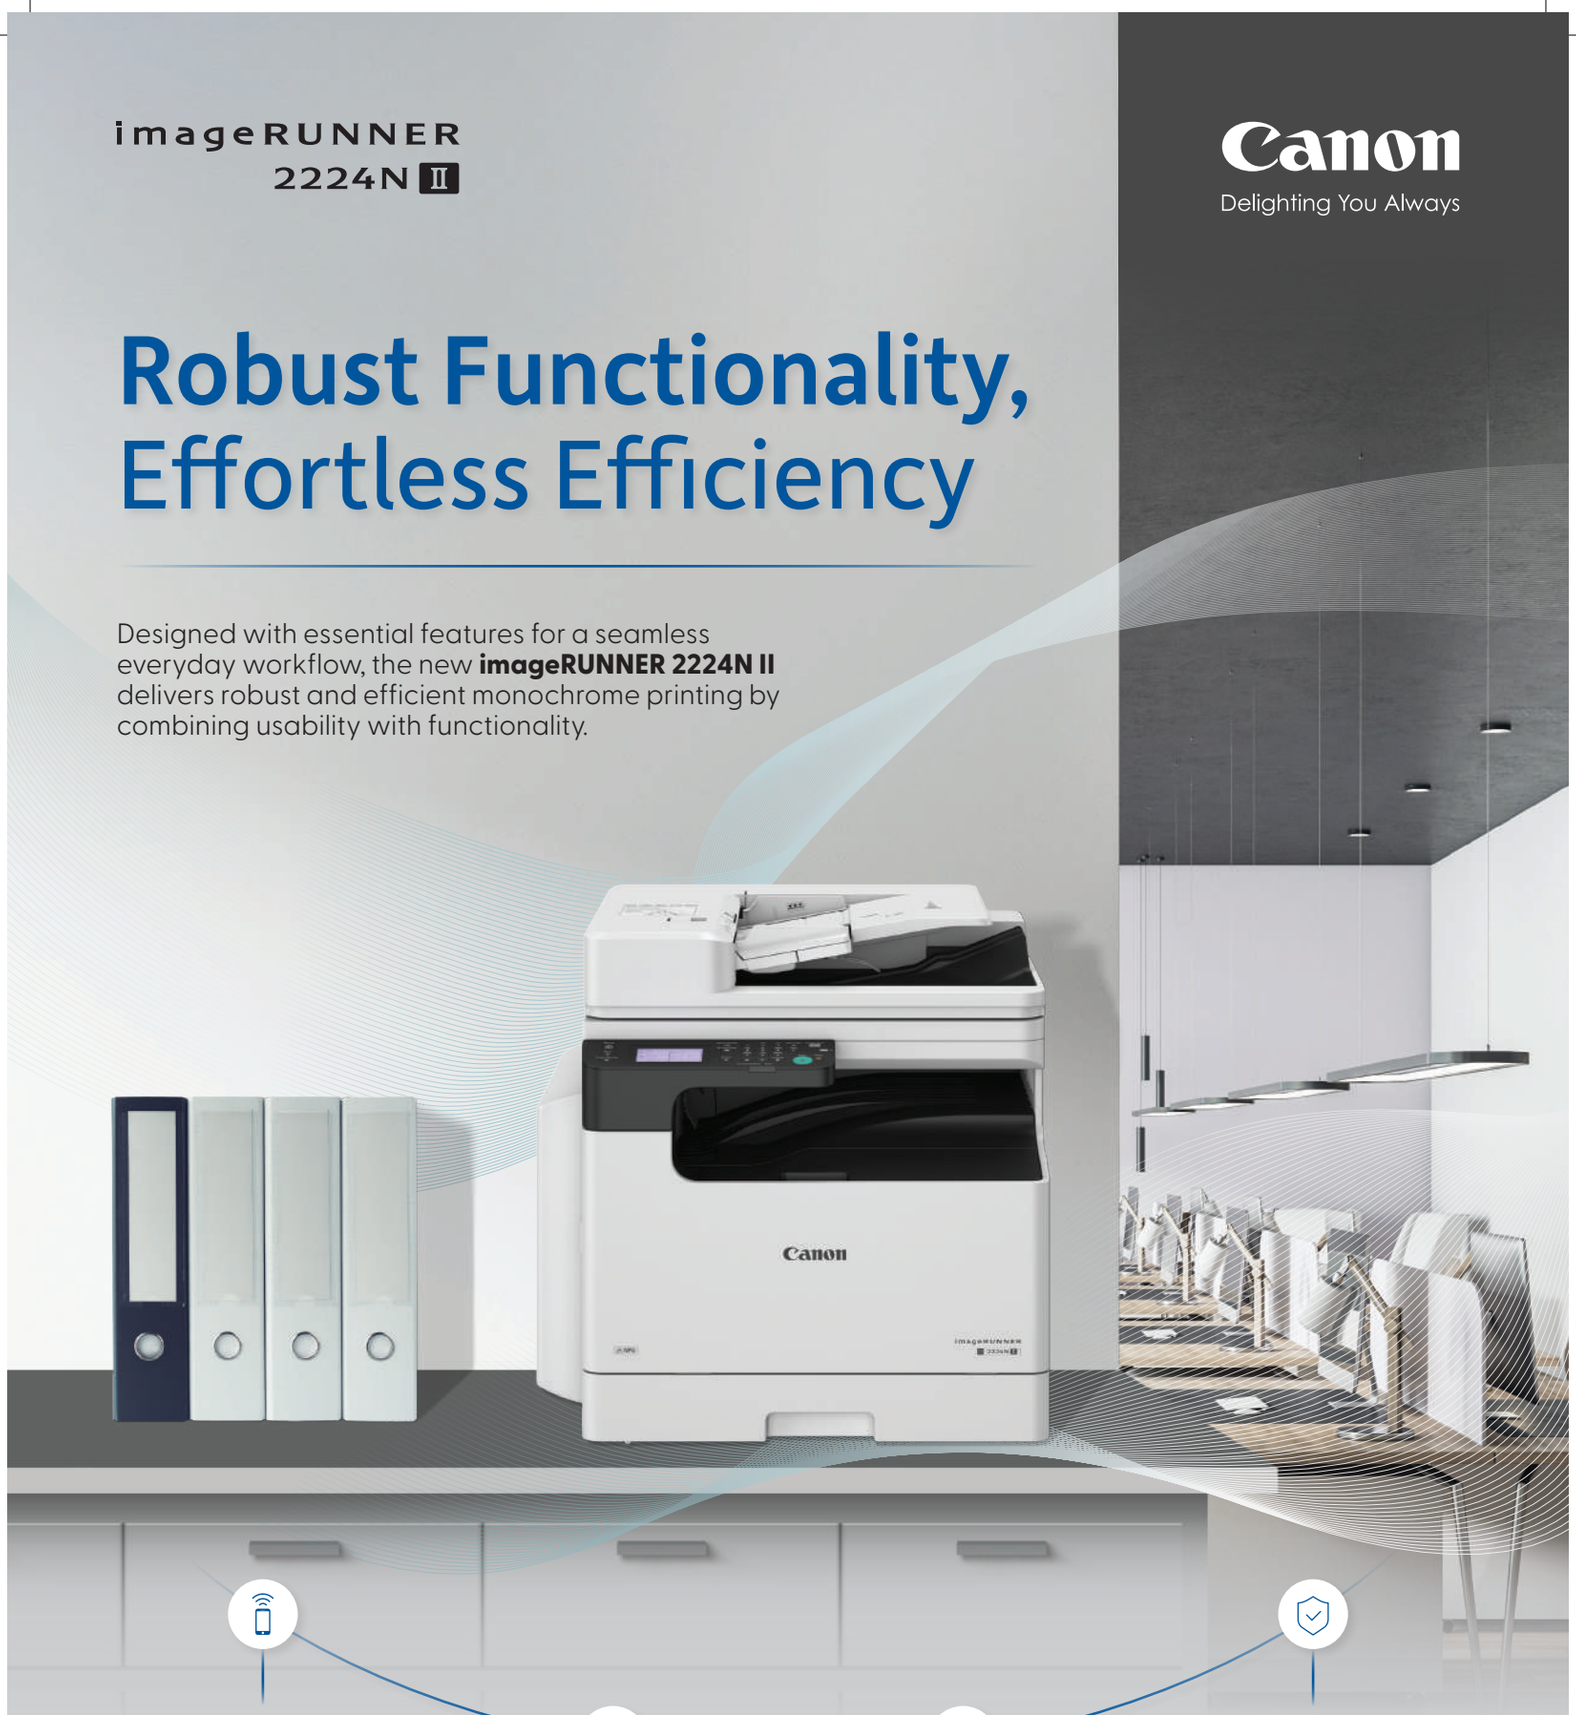

Convenient Connectivity
Pair your mobile devices directly to the multi-function device via direct connection without the need to connect to wireless LAN.
Print or scan documents with the Canon PRINT App on-the-go.

Enhanced Usability
The 8.89cm (3.5 inch) touch panel allows for easy navigation and customisation of the Home screen.

Dual ID Card Printing
Equipped with ID Copy function, users can easily copy both sides of an ID card into a page.

Optimal Security
Verify System at Start-up checks the integrity of the device firmware and applications to prevent unauthorised modifications, keeping your prints safe.

Business Can Be Simple

SPECIFICATIONS

MAIN UNIT	imageRUNNER 2224N II
Machine Type	A3 Monochrome Laser Multifunctional
Core Functions	Print, Copy, Scan and Send
Control Panel	8.89cm (3.5 inch) Monochrome Touch Panel
Memory	RAM 1.5 GB
Storage	eMMC: 2 GB
Interface Connection	NETWORK Standard: 100Base-TX/10Base-T, Wireless LAN (IEEE 802.11 b/g/n)
	OTHERS Standard: USB 2.0 (Device) x1
Paper Supply Capacity (A4, 80g/m² (gsm))	Standard: 350 sheets (Paper Drawer: 250 Sheets, MPT Tray: 100 Sheets) Maximum: 600 sheets (with Cassette Feeding Module-AK1)
Paper Output Capacity (A4, 80g/m² (gsm))	250 sheets
Supported Media Types	Multi-Purpose Tray: Thin, Plain, Recycled, Thick, Colour, Bond, Label, Pre-punched, Envelope
	Paper Cassette: Plain, Recycled, Colour, Pre-punched
Supported Media Sizes	Multi-Purpose Tray: A3, A4, A4R, A5, A5R, B4, B5, B5R, Envelope (COM10, Monarch, DL, ISO-C5), Custom size: 95.0 x 148.0 mm to 297.0 x 431.8 mm
	Paper Cassette: Standard size: A3, A4, A4R, A5R, B4, B5, B5R
Supported Media Weights	Multi-Purpose Tray: 60 to 157g/m²(gsm)
	Paper Cassettes: 64 to 90g/m²(gsm)
	Duplex: 60 to 90g/m²(gsm)
Warm-up Time	From Power On: 13 s or less **Time from device power-on, until copy ready (not print reservation)*
	From Sleep Mode: 4.3 s or less
Dimensions (W x D x H)	With SP DADF: 627 x 617 x 606 mm With Platen cover: 627 x 589 x 518 mm
Installation Space (W x D)	1 065 x 1 285 mm
Weight	Approx. 38.4 kg without toner and including SP DADF.
PRINT	
Print Speed (BW)	1-sided: Up to 24 pages/min (A4), Up to 12 pages/min (A3), Up to 11 pages/min (A4R)
Print Resolution (dpi)	600 x 600
Page Description Languages	Standard: UFRII Optional: PCL6
Fonts	PCL fonts: 45 Roman, 10 Bitmap fonts
Operating System	UFRII: Windows®10/11 /Server2016/Server2019/Server2022/Server2025, Mac OS® (10.15 or later) PCL: Windows®10/11/Server2016/Server2019/Server2022/Server2025 *As of Jan 2025*

COPY	imageRUNNER 2224N II
Copy Speed	1-sided: Up to 24 pages/min (A4), Up to 12 pages/min (A3), Up to 11 pages/min (A4R)
First-Copy-Out Time (A4, BW)	Platen: Approx. 7.4 s or less
Copy Resolution (dpi)	600 x 600
Multiple Copies	Up to 999 copies
Copy Density	Automatic or Manual (9 Levels)
Magnification	Variable zoom: 25% to 400% (1% Increments)
SCAN	
Document Feeder Paper Capacity	Up to 100 Sheets (80g/m²(gsm))
Acceptable Paper Weight	Document Feeder sheet media weight : 1-sided Scanning: 38 to 220g/m²(gsm) (BW/CL) 2-sided Scanning: 50 to 220g/m²(gsm) (BW/CL) Only 1-sheet feeding is supported for paper with 38-42g/m²(gsm)
Supported Media Sizes	Platen: 297.0 x 431.8 mm
	Document Feeder: A3, A4, A4R, A5, A5R, B4, B5, B5R Custom size: 48.0 x 85.0 mm to 304.8 x 431.8 mm
Scan Speed (ipm: BW/CL; A4)	1-sided Scanning: 35/35 (300 dpi, send), 30/30 (600 dpi, copy) 2-sided Scanning: 70/70 (300 dpi, send), 60/40 (600 dpi, copy)
Scan Resolution (dpi)	Scan for Copy: Up to 600 x 600 Scan for Send: Up to 300 x 600 (Push), Up to 600 x 600 (Pull)
Pull Scan Specifications	ScanGear MF For both TWAIN and WIA
	Windows®10/11, macOS® (10.15 or later) *As of Jan 2025*
SEND	
Destination	E-mail(SMTP*)/, SMB **Available OAuth 2.0 authentication method on Microsoft 365 and Google Workspace*
Address Book	LDAP (50)/Local (300)/One-touch (296)
Communication Protocol	File: SMB3.1.1 (TCP/IP)
	Email: SMTP (Send)
File Format	Standard: TIFF, JPEG*, PDF (Compact) **Single Page Only*
ENVIRONMENTAL	
Operating Environment	Temperature: 10-30°C Humidity: 20-80% RH (Relative Humidity)
Power Source	220-240V 50/60Hz (2.8A)
Power Consumption	Maximum: Approx. 1 500 W
	Standby: Approx. 25.7 W
	Sleep mode: Approx. 0.9 W
PAPER SUPPLY	
Cassette Module-AM1	Paper Capacity: 250 sheets x 1 (80g/m²(gsm)) Paper Type: Plain, Recycled, Colour, Pre-punched Paper Size: A3, A4, A4R, A5, B4, B5, B5R Paper Weight: 64 to 90g/m²(gsm) Power Source: From the Main Unit

Canon
Delighting You Always

CANON INDIA PVT. LTD.
7th Floor, Tower-B, DLF Building No. 5, DLF Cyber City, Gurgaon 122002, Haryana, India
Ph.: 0124-4160000 I Fax: 0124-4160011 I Web: in.canon

DEALER'S STAMP

This document is for general information only and contents are subject to change without notice. Errors and omissions excepted. Weights and dimensions are approximates. Options, name and availability may vary by regions. Nothing in this document should be construed as a warranty. We expressly disclaim any liability or contractual obligations in connection with this document. Trademarks belong to their respective owners.

© Canon India Pvt. Ltd. 2026. All rights reserved.